

(19)



Deutsches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 698 140 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
02.07.1997 Bulletin 1997/27

(51) Int Cl.⁶: D21H 17/14, D21H 17/06,
D21H 21/24

(21) Application number: 94917282.9

(86) International application number:
PCT/US94/04738

(22) Date of filing: 29.04.1994

(87) International publication number:
WO 94/26971 (24.11.1994 Gazette 1994/26)

(54) TISSUE PAPER TREATED WITH TRI-COMPONENT BIODEGRADABLE SOFTENER COMPOSITION

MIT EINER DREIKOMPONENTIGEN BIOLOGISCH ABBAUBAREN WEICH- MACHENDEN
ZUSAMMENSETZUNG BEHANDELTES PAPIERGEWEBE

PAPIER OUATE TRAITE AVEC UNE COMPOSITION ADOUCISSANTE BIODEGRADABLE A TROIS
COMPOSANTS

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI LU NL PT
SE

(30) Priority: 13.05.1993 US 61137

(43) Date of publication of application:
28.02.1996 Bulletin 1996/09

(73) Proprietor: THE PROCTER & GAMBLE COMPANY
Cincinnati, Ohio 45202 (US)

(72) Inventors:
• PHAN, Dean, Van
West Chester, OH 45069 (US)
• TROKHAN, Paul, Dennis
Hamilton, OH 45013 (US)

(74) Representative: Hirsch, Uwe Thomas et al
Procter & Gamble European Service GmbH,
Sulzbacher Strasse 40-50
65824 Schwalbach am Taunus (DE)

(56) References cited:
WO-A-94/05856 FR-A- 2 269 601

Drei Bestandteile:

- So. Sulfonate
- oth. Sulfonate
- Glycerin / PEG

EP 0 698 140 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**FIELD OF THE INVENTION**

This application relates to tissue papers, in particular pattern densified tissue papers, having an enhanced tactile sense of softness. This application particularly relates to tissue papers treated with tri-component softener compositions that are biodegradable.

BACKGROUND OF THE INVENTION

Paper webs or sheets, sometimes called tissue or paper tissue webs or sheets, find extensive use in modern society. These include such staple items as paper towels, facial tissues and sanitary (or toilet) tissues. These paper products can have various desirable properties, including wet and dry tensile strength, absorbency for aqueous fluids (e.g., wettability), low lint properties, desirable bulk, and softness. The particular challenge in papermaking has been to appropriately balance these various properties to provide superior tissue paper.

Although somewhat desirable for towel products, softness is a particularly important property for facial and toilet tissues. Softness is the tactile sensation perceived by the consumer who holds a particular paper product, rubs it across the skin, and crumples it within the hand. Such tactile perceivable softness can be characterized by, but is not limited to, fiction, flexibility, and smoothness, as well as subjective descriptors, such as a feeling like velvet, silk or flannel. This tactile sensation is a combination of several physical properties, including the flexibility or stiffness of the sheet of paper, as well as the texture of the surface of the paper.

Stiffness of paper is typically affected by efforts to increase the dry and/or wet tensile strength of the web. Increases in dry tensile strength can be achieved either by mechanical processes to insure adequate formation of hydrogen bonding between the hydroxyl groups of adjacent papermaking fibers, or by the inclusion of certain dry strength additives. Wet strength is typically enhanced by the inclusion of certain wet strength resins, that, being typically cationic, are easily deposited on and retained by the anionic carboxyl groups of the papermaking fibers. However, the use of both mechanical and chemical means to improve dry and wet tensile strength can also result in stiffer, harsher feeling, less soft tissue papers.

Certain chemical additives, commonly referred to as debonding agents, can be added to papermaking fibers to interfere with the natural fiber-to-fiber bonding that occurs during sheet formation and drying, and thus lead to softer papers. These debonding agents are typically cationic and have certain disadvantages associated with their use in softening tissue papers. Some low molecular weight cationic debonding agents can cause excessive irritation upon contact with human skin. Higher

molecular weight cationic debonding agents can be more difficult to apply at low levels to tissue paper, and also tend to have undesirable hydrophobic effects on the tissue paper, e.g., result in decreased absorbency and particularly wettability. Since these cationic debonding agents operate by disrupting interfiber bonding, they can also decrease tensile strength to such an extent that resins, latex, or other dry strength additives can be required to provide acceptable levels of tensile strength. These dry strength additives not only increase the cost of the tissue paper but can also have other, deleterious effects on tissue softness. In addition, many cationic debonding agents are not biodegradable, and therefore can adversely impact on environmental quality.

Mechanical pressing operations are typically applied to tissue paper webs to dewater them and/or increase their tensile strength. Mechanical pressing can occur over the entire area of the paper web, such as in the case of conventional felt-pressed paper. More preferably, dewatering is carried out in such a way that the paper is pattern densified. Pattern densified paper has certain densified areas of relatively high fiber density, as well as relatively low fiber density, high bulk areas. Such high bulk pattern densified papers are typically formed from a partially dried paper web that has densified areas imparted to it by a foraminous fabric having a patterned displacement of knuckles. See, for example, U.S. Patent 3,301,746 (Sanford et al), issued January 31, 1967; U.S. Patent 3,994,771 (Morgan et al), issued November 30, 1976; and U.S. patent 4,529,480 (Trokhan), issued July 16, 1985.

Besides tensile strength and bulk, another advantage of such patterned densification processes is that ornamental patterns can be imprinted on the tissue paper. However, an inherent problem of patterned densification processes is that the fabric side of the tissue paper, i.e. the paper surface in contact with the foraminous fabric during papermaking, is sensed as rougher than the side not in contact with the fabric. This is due to the high bulk fields that form, in essence, protrusions outward from the surface of the paper. It is these protrusions that can impart a tactile sensation of roughness.

The softness of these compressed, and particularly patterned densified tissue papers, can be improved by treatment with various agents such as vegetable, animal or synthetic hydrocarbon oils, and especially polysiloxane materials typically referred to as silicone oils. See Column 1, lines 30-45 of U.S. Patent 4,959,125 (Spendel), issued September 25, 1990. These silicone oils impart a silky, soft feeling to the tissue paper. However, some silicone oils are hydrophobic and can adversely affect the surface wettability of the treated tissue paper, i.e. the treated tissue paper can float, thus causing disposal problems in sewer systems when flushed. Indeed, some silicone softened papers can require treatment with other surfactants to offset this reduction in wettability caused by the silicone. See U.S. Patent 5,059,282 (Ampulski et al), issued October 22, 1991.

Besides silicones, tissue paper has been treated with cationic, as well as noncationic, surfactants to enhance softness. See, for example, U.S. Patent 4,959,125 (Spendel), issued September 25, 1990; and U.S. Patent 4,940,513 (Spendel), issued July 10, 1990, that disclose processes for enhancing the softness of tissue paper by treating it with noncationic, preferably nonionic, surfactants. However, the '125 patent teaches that greater softness benefits are obtainable by the addition of the noncationic surfactants to the wet paper web; the '513 patent only discloses the addition of noncationic surfactants to a wet web. In such "wet web" methods of addition, the noncationic surfactant can potentially migrate to the interior of the paper web and completely coat the fibers. This can cause a variety of problems, including fiber debonding that leads to a reduction in tensile strength of the paper, as well as adverse effects on paper wettability if the noncationic surfactant is hydrophobic or not very hydrophilic.

Tissue paper has also been treated with softeners by "dry web" addition methods. One such method involves moving the dry paper across one face of a shaped block of wax-like softener that is then deposited on the paper surface by a rubbing action. See U.S. Patent 3,305,392 (Britt), issued February 21, 1967 (softeners include stearate soaps such as zinc stearate, stearic acid esters, stearyl alcohol, polyethylene glycols such as Carbowax, and polyethylene glycol esters of stearic and lauric acids). Another such method involves dipping the dry paper in a solution or emulsion containing the softening agent. See U.S. Patent 3,296,065 (O'Brien et al), issued January 3, 1967 (aliphatic esters of certain aliphatic or aromatic carboxylic acids as the softening agent). A potential problem of these prior "dry web" addition methods is that the softening agent can be applied less effectively, or in a manner that could potentially affect the absorbency of the tissue paper. Indeed, the '392 patent teaches as desirable modification with certain cationic materials to avoid the tendency of the softener to migrate. Application of softeners by either a rubbing action or by dipping the paper would also be difficult to adapt to commercial papermaking systems that run at high speeds. Furthermore, some of the softeners (e.g., the pyromellitate esters of the '065 patent), as well as some of the co-additives (e.g., dimethyl distearyl ammonium chloride of the '532 patent), taught to be useful in these prior "dry web" methods are not biodegradable.

Accordingly, it would be desirable to be able to soften tissue paper, in particular high bulk, pattern densified tissue papers, by a process that: (1) uses a "dry web" method for adding the softening agent; (2) can be carried out in a commercial papermaking system without significantly impacting on machine operability; (3) uses softeners that are nontoxic and biodegradable; and (4) can be carried out in a manner so as to maintain desirable tensile strength, absorbency and low lint properties of the tissue paper.

SUMMARY OF THE INVENTION

The present invention relates to softened tissue paper having a tri-component softener composition on at least one surface thereof. Suitable tri-component softeners comprise: (i) a nonionic softener selected from the group consisting of sorbitan mono-, di-, tri- esters and mixtures thereof; (ii) a nonionic surfactant compatibilizer selected from the group consisting of ethoxylated sorbitan esters, propoxylated sorbitan esters, alkylpolyglycosides and mixtures thereof, and; (iii) a polyhydroxy compound selected from the group consisting of glycerol, polyethylene glycol, polypropylene glycol and mixtures thereof. The weight ratio of the nonionic softener to the nonionic surfactant compatibilizer ranges from about 10 : 1 to 1 : 10; and the weight ratio of the nonionic softener to the polyhydroxy compound ranges from about 10 : 1 to 1 : 10 in the tri-component softener mixtures. The softener is present in an amount of from about 0.1 to about 3% by weight of the dried tissue paper.

The process for making these softened tissue papers comprises the step of treating at least one surface of a dried tissue paper web with the softener. In other words, the process of the present invention is a "dry web" addition method. This process is carried out in a manner such that from about 0.1 to about 3% of the softener by weight of the dry tissue paper web is applied to the surface thereof.

Tissue paper softened according to the present invention has a soft and velvet-like feel. It is especially useful in softening high bulk, pattern densified tissue papers, including tissue papers having patterned designs. Surprisingly, even when the softener is applied only to the smoother (i.e. wire) side of such pattern densified papers, the treated paper is still perceived as soft.

The present invention can be carried out in a commercial papermaking system without significantly impacting on machine operability, including speed. The softeners used in the present invention also have environmental safety (i.e. are nontoxic and biodegradable) and cost advantages, especially compared to prior softening agents used to treat tissue paper. The improved softness benefits of the present invention can also be achieved while maintaining the desirable tensile strength, absorbency (e.g., wettability), and low lint properties of the paper.

BRIEF DESCRIPTION OF THE DRAWING

Figure 1 is a schematic representation illustrating a preferred embodiment of the process for softening tissue webs according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

A. Tissue Papers

The present invention is useful with tissue paper in general, including but not limited to conventionally felt-pressed tissue paper; high bulk pattern densified tissue paper; and high bulk, uncompacted tissue paper. The tissue paper can be homogeneous or multi-layered construction; and tissue paper products made therefrom can be of a single-ply or multi-ply construction. The tissue paper preferably has a basis weight of between about 10 g/m² and about 65 g/m², and density of about 0.6 g/cm³ or less. More preferably, the basis weight will be about 40 g/m² or less and the density will be about 0.3 g/cm³ or less. Most preferably, the density will be between about 0.04 g/cm³ and about 0.2 g/cm³. See Column 13, lines 61-67, of U.S. Patent 5,059,282 (Ampulski et al), issued October 22, 1991, which describes how the density of tissue paper is measured. (Unless otherwise specified, all amounts and weights relative to the paper are on a dry basis.)

Conventionally pressed tissue paper and methods for making such paper are well known in the art. Such paper is typically made by depositing a papermaking furnish on a foraminous forming wire, often referred to in the art as a Fourdrinier wire. Once the furnish is deposited on the forming wire, it is referred to as a web. After transferring to a felt, the web is dewatered by pressing the web and drying at elevated temperature. The particular techniques and typical equipment for making webs according to the process just described are well known to those skilled in the art. In a typical process, a low consistency pulp furnish is provided from a pressurized headbox. The headbox has an opening for delivering a thin deposit of pulp furnish onto the Fourdrinier wire to form a wet web. The web is then typically dewatered to a fiber consistency of between about 7% and about 25% (total web weight basis) by vacuum dewatering and further dried by pressing operations wherein the web is subjected to pressure developed by opposing mechanical members, for example, cylindrical rolls. The dewatered web is then further pressed and dried by a steam drum apparatus known in the art as a Yankee dryer. Pressure can be developed at the Yankee dryer by mechanical means such as an opposing cylindrical drum pressing against the web. The web may optionally be under vacuum during the Yankee operation. Multiple Yankee dryer drums can be employed, whereby additional pressing is optionally incurred between the drums. The tissue paper structures which are formed are referred to hereafter as conventional, pressed, tissue paper structures. Such sheets are considered to be compacted since the entire web is subjected to substantial mechanical compressional forces while the fibers are moist and are then dried while in a compressed state.

Pattern densified tissue paper is characterized by having a relatively high bulk field of relatively low fiber

density and an array of densified zones of relatively high fiber density. The high bulk field is alternatively characterized as a field of pillow regions. The densified zones are alternatively referred to as knuckle regions. The densified zones can be discretely spaced within the high bulk field or can be interconnected, either fully or partially, within the high bulk field. The patterns can be formed in a nonornamental configuration or can be formed so as to provide an ornamental design(s) in the tissue paper. Preferred processes for making pattern densified tissue webs are disclosed in U.S. Patent No. 3,301,746 (Sanford et al), issued January 31, 1967; U.S. Patent No. 3,974,025 (Ayers), issued August 10, 1976; U.S. Patent No. 4,191,609 (Trokhan) issued March 4, 1980; and U.S. Patent 4,637,859 (Trokhan) issued January 20, 1987.

In general, pattern densified webs are preferably prepared by depositing a papermaking furnish on a foraminous forming wire such as a Fourdrinier wire to form a wet web and then juxtaposing the web against an array of supports. The web is pressed against the array of supports, thereby resulting in densified zones in the web at the locations geographically corresponding to the points of contact between the array of supports and the wet web. The remainder of the web not compressed during this operation is referred to as the high bulk field. This high bulk field can be further dedensified by application of fluid pressure, such as with a vacuum type device or a blow-through dryer. The web is dewatered, and optionally predried, in such a manner so as to substantially avoid compression of the high bulk field. This is preferably accomplished by fluid pressure, such as with a vacuum type device or blow-through dryer, or alternately by mechanically pressing the web against an array of supports wherein the high bulk field is not compressed. The operations of dewatering, optional predrying and formation of the densified zones can be integrated or partially integrated to reduce the total number of processing steps performed. Subsequent to formation of the densified zones, dewatering, and optional predrying, the web is dried to completion, preferably still avoiding mechanical pressing. Preferably, from about 8% to about 55% of the tissue paper surface comprises densified knuckles having a relative density of at least 125% of the density of the high bulk field.

The array of supports is preferably an imprinting carrier fabric having a patterned displacement of knuckles which operate as the array of supports which facilitate the formation of the densified zones upon application of pressure. The pattern of knuckles constitutes the array of supports previously referred to. Suitable imprinting carrier fabrics are disclosed in U.S. Patent No. 3,301,746 (Sanford et al), issued January 31, 1967; U.S. Patent No. 3,821,068 (Salvucci et al), issued May 21, 1974; U.S. Patent No. 3,974,025 (Ayers), issued August 10, 1976; U.S. Patent No. 3,573,164 (Friedberg et al.), issued March 30, 1971; U.S. Patent No. 3,473,576 (Amneus), issued October 21, 1969; U.S. Patent No.

4,239,065 (Trokhan), issued December 16, 1980; and U.S. Patent No. 4,528,239 (Trokhan), issued July 9, 1985.

Preferably, the furnish is first formed into a wet web on a foraminous forming carrier, such as a Fourdrinier wire. The web is dewatered and transferred to an imprinting fabric. The furnish can alternately be initially deposited on a foraminous supporting carrier which also operates as an imprinting fabric. Once formed, the wet web is dewatered and, preferably, thermally predried to a selected fiber consistency of between about 40% and about 80%. Dewatering is preferably performed with suction boxes or other vacuum devices or with blow-through dryers. The knuckle imprint of the imprinting fabric is impressed in the web as discussed above, prior to drying the web to completion. One method for accomplishing this is through application of mechanical pressure. This can be done, for example, by pressing a nip roll which supports the imprinting fabric against the face of a drying drum, such as a Yankee dryer, wherein the web is disposed between the nip roll and drying drum. Also, preferably, the web is molded against the imprinting fabric prior to completion of drying by application of fluid pressure with a vacuum device such as a suction box, or with a blow-through dryer.

Uncompacted, nonpattern-densified tissue paper structures are described in U.S. Patent No. 3,812,000 (Salvucci et al), issued May 21, 1974 and U.S. Patent No. 4,208,459 (Becker et al), issued June 17, 1980. In general, uncompacted, nonpattern-densified tissue paper structures are prepared by depositing a papermaking furnish on a foraminous forming wire such as a Fourdrinier wire to form a wet web, draining the web and removing additional water without mechanical compression until the web has a fiber consistency of at least about 80%, and creping the web. Water is removed from the web by vacuum dewatering and thermal drying. The resulting structure is a soft but weak high bulk sheet of relatively uncompacted fibers. Bonding material is preferably applied to portions of the web prior to creping.

The papermaking fibers utilized for the present invention will normally include fibers derived from wood pulp. Other cellulosic fibrous pulp fibers, such as cotton linters, bagasse, etc., can be utilized and are intended to be within the scope of this invention. Synthetic fibers, such as rayon, polyethylene and polypropylene fibers, can also be utilized in combination with natural cellulosic fibers. One exemplary polyethylene fiber which can be utilized is PulpexTM, available from Hercules, Inc. (Wilmington, Delaware). Applicable wood pulps include chemical pulps, such as Kraft, sulfite, and sulfate pulps, as well as mechanical pulps including, for example, groundwood, thermomechanical pulp and chemically modified thermomechanical pulp. Chemical pulps, however, are preferred since they impart a superior tactile sense of softness to tissue sheets made therefrom. Pulps derived from both deciduous trees (hereafter, also referred to as "hardwood") and coniferous trees (here-

after, also referred to as "softwood") can be utilized. Also useful in the present invention are fibers derived from recycled paper, which can contain any or all of the above categories as well as other non-fibrous materials such as fillers and adhesives used to facilitate the original papermaking.

In addition to papermaking fibers, the papermaking furnish used to make tissue paper structures can have other components or materials added thereto as can be or later become known in the art. The types of additives desirable will be dependent upon the particular end use of the tissue sheet contemplated. For example, in products such as toilet paper, paper towels, facial tissues and other similar products, high wet strength is a desirable attribute. Thus, it is often desirable to add to the papermaking furnish chemical substances known in the art as "wet strength" resins.

A general dissertation on the types of wet strength resins utilized in the paper art can be found in TAPPI monograph series No. 29, Wet Strength in Paper and Paperboard, Technical Association of the Pulp and Paper Industry (New York, 1965). The most useful wet strength resins have generally been cationic in character. Polyamide epichlorohydrin resins are cationic wet strength resins which have been found to be of particular utility. Suitable types of such resins are described in U. S. Patent No. 3,700,623 (Keim), issued October 24, 1972, and U.S. Patent No. 3,772,076 (Keim), issued November 13, 1973. One commercial source of a useful polyamide-epichlorohydrin resins is Hercules, Inc. of Wilmington, Delaware, which markets such resins under the mark Kymeme[®] 557H.

Polyacrylamide resins have also been found to be of utility as wet strength resins. These resins are described in U.S. Patent Nos. 3,556,932 (Coscia et al), issued January 19, 1971, and 3,556,933 (Williams et al), issued January 19, 1971. One commercial source of polyacrylamide resins is American Cyanamid Co. of Stamford, Connecticut, which markets one such resin under the mark Parex[®] 631 NC.

Still other water-soluble cationic resins finding utility in this invention are urea formaldehyde and melamine formaldehyde resins. The more common functional groups of these polyfunctional resins are nitrogen containing groups such as amino groups and methylol groups attached to nitrogen. Polyethylenimine type resins can also find utility in the present invention. In addition, temporary wet strength resins such as Caldas 10 (manufactured by Japan Carlit) and CoBond 1000 (manufactured by National Starch and Chemical Company) can be used in the present invention. It is to be understood that the addition of chemical compounds such as the wet strength and temporary wet strength resins discussed above to the pulp furnish is optional and is not necessary for the practice of the present invention.

In addition to wet strength additives, it can also be desirable to include in the papermaking fibers certain

dry strength and lint control additives known in the art. In this regard, starch binders have been found to be particularly suitable. In addition to reducing linting of the finished tissue paper product, low levels of starch binders also impart a modest improvement in the dry tensile strength without imparting stiffness that could result from the addition of high levels of starch. Typically the starch binder is included in an amount such that it is retained at a level of from about 0.01 to about 2%, preferably from about 0.1 to about 1%, by weight of the tissue paper.

In general, suitable starch binders for the present invention are characterized by water solubility, and hydrophilicity. Although it is not intended to limit the scope of suitable starch binders, representative starch materials include corn starch and potato starch, with waxy corn starch known industrially as amioca starch being particularly preferred. Amioca starch differs from common corn starch in that it is entirely amylopectin, whereas common corn starch contains both amylopectin and amylose. Various unique characteristics of amioca starch are further described in "Amioca - The Starch From Waxy Corn", H. H. Schopmeyer, Food Industries, December 1945, pp. 106-108 (Vol. pp. 1476-1478).

The starch binder can be in granular or dispersed form, the granular form being especially preferred. The starch binder is preferably sufficiently cooked to induce swelling of the granules. More preferably, the starch granules are swollen, as by cooking, to a point just prior to dispersion of the starch granule. Such highly swollen starch granules shall be referred to as being "fully cooked." The conditions for dispersion in general can vary depending upon the size of the starch granules, the degree of crystallinity of the granules, and the amount of amylose present. Fully cooked amioca starch, for example, can be prepared by heating an aqueous slurry of about 4% consistency of starch granules at about 190°F (about 88°C) for between about 30 and about 40 minutes. Other exemplary starch binders which can be used include modified cationic starches such as those modified to have nitrogen containing groups, including amino groups and methylol groups attached to nitrogen, available from National Starch and Chemical Company, (Bridgewater, New Jersey), that have heretofore been used as pulp furnish additives to increase wet and/or dry strength.

B. Tri-component Biodegradable Softener Compositions

Biodegradable Nonionic Softeners

The tri-component biodegradable softener compositions used to treat the tissue paper of the present invention comprise a mixture of a biodegradable nonionic softener, a nonionic surfactant compatibilizer, and a polyhydroxy compound.

Suitable nonionic softeners for use in the present

invention are biodegradable. As used herein, the term "biodegradability" refers to the complete breakdown of a substance by microorganisms to carbon dioxide, water, biomass, and inorganic materials. The biodegradation potential can be estimated by measuring carbon dioxide evolution and dissolved organic carbon removal from a medium containing the substance being tested as the sole carbon and energy source and a dilute bacterial inoculum obtained from the supernatant of homogenized activated sludge. See Larson, "Estimation of Biodegradation Potential of Xenobiotic Organic Chemicals," *Applied and Environmental Microbiology*, Volume 38 (1979), pages 1153-61, which describes a suitable method for estimating biodegradability. Using this method, a substance is said to be readily biodegradable if it has greater than 70% carbon dioxide evolution and greater than 90% dissolved organic carbon removal within 28 days. The softeners used in the present invention meet such biodegradability criteria.


Nonionic softeners suitable for use in the present invention comprise the sorbitan esters, preferably the sorbitan esters of the C₁₂-C₂₂ fatty acids, most preferably the sorbitan esters of C₁₂-C₂₂ saturated fatty acids. Because of the manner in which they are typically manufactured, these sorbitan esters usually comprise mixtures of mono-, di-, tri-, etc. esters. Representative examples of suitable sorbitan esters include the sorbitan laurates (e.g., SPAN 20), sorbitan myristates, sorbitan palmitates (e.g., SPAN 40), sorbitan stearates (e.g., SPAN 60), and sorbitan behenates, that comprise one or more of the mono-, di- and triester versions of these sorbitan esters, e.g., sorbitan mono-, di- and tri-laurate, sorbitan mono-, di- and tri-myristate, sorbitan mono-, di- and tri-palmitate, sorbitan mono-, di- and tri-stearate, sorbitan mono-, di- and tri-behenate, as well as mixed coconut fatty acid sorbitan mono-, di- and tri-esters, and mixed tallow fatty acid sorbitan mono-, di- and tri-esters. Mixtures of different sorbitan esters can also be used, such as sorbitan palmitates with sorbitan stearates. Particularly preferred sorbitan esters are the sorbitan stearates, typically as a mixture of mono-, di- and tri-esters (plus some tetraester) such as SPAN 60 sold by ICI America or GLYCOMUL-S sold by Lonza, Inc.

Nonionic Surfactant Compatibilizer

The tri-component softener composition contains as an essential component a nonionic surfactant compatibilizer. The nonionic surfactant compatibilizer aids in the dispersion and stabilization of the softener particles in an aqueous media. Preferably, the nonionic softener is mixed with the nonionic surfactant compatibilizer at a temperature of at least about 48 °C before being mixed with the polyhydroxy compound. The mixture of these ingredients is then gradually dispersed in an aqueous media with adequate mixing to form a dispersion of the nonionic softener particles. The average particle size of the nonionic softener is preferably from

about 10 to 200 micrometer, more preferably from about 30 to 100 micrometer. Preferably, the aqueous media is also heated up to a temperature of at least about 48 °C before being mixed with the nonionic softener, nonionic surfactant compatibilizer, and polyhydroxy compound.

Nonionic surfactant compatibilizers suitable in the tri-component softener compositions of the present invention include ethoxylated, propoxylated, and mixed ethoxylated / propoxylated versions of these sorbitan esters. The ethoxylated/propoxylated versions of these sorbitan esters have 1 to 3 oxyethylene/oxypropylene moieties and typically an average degree of ethoxylation/propoxylation of from 1 to about 20. Representative examples of suitable ethoxylated/propoxylated sorbitan esters include ethoxylated / propoxylated sorbitan laurates, ethoxylated/propoxylated sorbitan myristates, ethoxylated/propoxylated sorbitan palmitates, ethoxylated/propoxylated sorbitan stearates, and ethoxylated / propoxylated sorbitan behenates, where the average degree of ethoxylation / propoxylation per sorbitan ester is preferably from about 2 to about 10, most preferably from about 2 to about 6. Ethoxylated versions of these sorbitan esters are especially preferred and are commercially available under the trade name TWEEN. A particularly preferred version of these sorbitan esters is ethoxylated sorbitan stearate having an average degree of ethoxylation per sorbitan ester of about 4, such as TWEEN 60 sold by ICI America or GLYCOSPERSE sold by Lonza, Inc.. Alkylpolyglycosides can also be used in the present invention as nonionic surfactant compatibilizers. The preferred alkylpolyglycosides have the formula:



wherein R_2 is selected from the group consisting of alkyl, alkylphenyl, hydroxyalkyl, hydroxyalkylphenyl, and mixtures thereof in which the alkyl groups contain from about 10 to about 18, preferably from about 12 to about 14, carbon atoms; n is 2 or 3, preferably 2; t is from 0 to about 10, preferably 0; and x is from about 1-1/2 to about 10, preferably from about 1-1/2 to about 3, most preferably from about 1.6 to about 2.7. The glycosyl is preferably derived from glucose. To prepare these compounds, the alcohol or alkylpolyethoxy alcohol is formed first and then reacted with glucose, or a source of glucose, to form the glucoside (attachment at the 1-position). The additional glycosyl units can then be attached between their 1-position and the preceding glycosyl units 2-, 3-, 4- and/or 6-position, preferably predominately the 2-position. Commercially available alkylglycosides include alkylglycoside polyesters such as Crodesta™ SL-40 which is available from Croda, Inc. (New York, NY) and alkylglycoside polyethers as described in U.S. Patent 4,011,389, issued to W. K. Langdon, et al., on March 8, 1977. Alkylglycosides are additionally disclosed in U.S. Patent 3,598,865, Lew, issued

August 1971; U.S. Patent 3,721,633, Ranaut, issued March 1973; U.S. Patent 3,772,269, Lew, issued November 1973; U.S. Patent 3,640,998, Mansfield et al, issued February 1972; U.S. Patent 3,839,318, Mansfield, issued October 1974; and U.S. Patent 4,223,129, Roth et al., issued in September 1980.

Polyhydroxy Compound

The tri-component softener composition contains as an essential component a polyhydroxy compound. Examples of polyhydroxy compounds useful in the present invention include glycerol, and polyethylene glycols and polypropylene glycols having a weight average molecular weight of from about 200 to about 4000, preferably from about 200 to about 1000, most preferably from about 200 to about 600. Polyethylene glycols having an weight average molecular weight of from about 200 to about 600 are especially preferred.

A particularly preferred polyhydroxy compound is polyethylene glycol having an weight average molecular weight of about 400. This material is available commercially from the Union Carbide Company of Danbury, Connecticut under the tradename "PEG-400".

The above list of chemical softeners is intended to be merely exemplary in nature, and is not meant to limit the scope of the invention.

Molecular weight averages

If we consider a simple molecular weight distribution which represents the weight fraction (w_i) of molecules having relative molecular mass (M_i), it is possible to define several useful average values. Averaging carried out on the basis of the number of molecules (N_i) of a particular size (M_i) gives the Number Average Molecular Weight

$$\bar{M}_n = \frac{\sum N_i M_i}{\sum N_i}$$

An important consequence of this definition is that the Number Average Molecular Weight in grams contains Avogadro's Number of molecules.

This definition of molecular weight is consistent with that of monodisperse molecular species, i.e. molecules having the same molecular weight. Of more significance is the recognition that if the number of molecules in a given mass of a polydisperse polymer can be determined in some way then \bar{M}_n can be calculated readily. This is the basis of colligative property measurements.

Averaging on the basis of the weight fractions (w_i) of molecules of a given mass (M_i) leads to the definition of Weight Average Molecular Weights

$$\bar{M}_w = \frac{\sum W_i N_i}{\sum W_i} = \frac{\sum N_i M_i^2}{\sum N_i M_i}$$

\bar{M}_w is a more useful means for expressing polymer molecular weights than \bar{M}_n since it reflects more accurately such properties as melt viscosity and mechanical properties of polymers and is therefore used in the present invention.

C. Treated Tissue Paper With Aqueous System of Softener

In the preparation process, at least one surface of the dried tissue paper web is treated with the tri-component softener compositions. Any method suitable for applying additives to the surfaces of paper webs can be used. Suitable methods include spraying, printing (e.g., flexographic printing), coating (e.g., gravure coating), or combinations of application techniques, e.g.: spraying the softener on a rotating surface, such as a calendar roll, that then transfers the softener to the surface of the paper web. The softener can be applied either to one surface of the dried tissue paper web, or both surfaces. For example, in the case of pattern densified tissue papers, the softener can be applied to the rougher, fabric side, the smoother, wire side, or both sides of the tissue paper web. Surprisingly, even when the softener is applied only to the smoother, wire side of the tissue paper web, the treated paper is still perceived as soft.

In the preparation process, the tri-component softener composition is typically applied from an aqueous dispersion or solution. As previously noted, the ratio between the nonionic softeners and the nonionic surfactant compatibilizers can be varied typically from 10 : 1 to 1 : 10; preferably from 5 : 1 to 1 : 5; more preferably from 2 : 1 to 1 : 2; to aid the dispersion of the nonionic softener in an aqueous media. The use of nonionic surfactant compatibilizers reduces the average particle size, the particle size distribution and the apparent solution viscosity of the aqueous dispersion. In addition, the ratio between the nonionic softeners and the polyhydroxy compounds can be varied typically from 10 : 1 to 1 : 10; preferably from 5 : 1 to 1 : 5; more preferably from 2 : 1 to 1 : 2; to enhance the fiber absorbency and flexibility.

In formulating such aqueous systems, the softener is dispersed in the water in an effective amount. What constitutes "an effective amount" of the softener in the aqueous system depends upon a number of factors, including the type of softener used, the softening effects desired, the manner of application and like factors. Basically, the softener needs to be present in amount sufficient to provide effective softening without adversely affecting the ability to apply the softener from the aqueous system to the tissue paper web. For example, rela-

tively high concentrations of softener can make the dispersion/solution so viscous as to be difficult, or impossible, to apply the softener to the tissue paper web by conventional spray, printing or coating equipment.

In the preparation process, the softener is applied to the tissue paper web after it has been dried, i.e. the application of softener is a "dry web" addition method. When dried, the tissue paper usually has a moisture content of about 10% or less, preferably about 6% or less, most preferably about 3% or less. In commercial papermaking systems, treatment with the softener usually occurs after the tissue paper web has been dried by, and then creped from, a Yankee dryer. As previously noted, if added to a wet paper web, nonionic softeners, such as the sorbitan stearamides, have a greater potential to migrate to the interior of the web and completely coat the fibers. This can cause increased fiber debonding that could lead to a further reduction in tensile strength of the paper, as well as affect paper wettability if the softener is a less hydrophilic one, as are sorbitan stearamides.

Addition of such nonionic softeners to wet webs is particularly not desirable in commercial papermaking systems. Such addition can interfere with the glue coating on a Yankee dryer, and can also cause skip crepe and loss in sheet control. Accordingly, treatment of the tissue paper web with the softener after it has been dried, as in the present invention, avoids these potential problems of wet web addition, particularly in commercial papermaking systems.

In the preparation process, the tri-component softener composition is applied in an amount of from about 0.1 to about 3% by weight of the tissue paper web. Preferably, the softener is applied in an amount of from about 0.2 to about 0.8% by weight of the tissue paper web. Such relatively low levels of softener are adequate to impart enhanced softness to the tissue paper, yet do not coat the surface of the tissue paper web to such an extent that strength, absorbency, and particularly wettability, are substantially affected. The softener is also typically applied to the surface of the tissue paper web in a nonuniform manner. By "nonuniform" is meant that the amount, pattern of distribution, etc. of the softener can vary over the surface of the paper. For example, some portions of the surface of the tissue paper web can have greater or lesser amounts of softener, including portions of the surface that do not have any softener on it.

This typical nonuniformity of the softener on the tissue paper web is believed to be due, in large part, to the manner in which the softener is applied to the surface thereof. For example, in preferred treatment methods where aqueous dispersions or solutions of the softener are sprayed, the softener is applied as a regular, or typically irregular, pattern of softener droplets on the surface of the tissue paper web. This nonuniform application of softener is also believed to avoid substantial adverse effects on the strength and absorbency of the tissue paper, and in particular its wettability, as well as reducing the level of softener required to provide effective

softening of the tissue paper. The benefits of nonuniform application are believed to be especially important when the softener comprises less hydrophilic nonionic softeners, in particular sorbitan esters such as the sorbitan stearates.

The softener can be applied to the tissue paper web at any point after it has been dried. For example, the softener can be applied to the tissue paper web after it has been creped from a Yankee dryer and simultaneous with or prior to calendering. The softener can also be applied to the paper web after it has passed through such calender rolls and prior to being wound up on a parent roll. Although not usually preferred, the softener can also be applied to the tissue paper as it is being unwound from a parent roll and prior to being wound up on a smaller, finished paper product roll.

Figure 1 illustrates a preferred method of applying the aqueous dispersions or solutions of softener to the dry tissue paper web. Referring to Figure 1, wet tissue web 1 is carried on imprinting fabric 14 past turning roll 2 and then transferred to a Yankee dryer 5 (rotating in the direction indicated by arrow 5a) by the action of pressure roll 3 while imprinting fabric 14 travels past turning roll 16. The paper web is adhesively secured to the cylindrical surface of dryer 5 by an adhesive supplied from spray applicator 4. Drying is completed by steam heating dryer 5 and by hot air heated and circulated through drying hood 6 by means not shown. The web is then dry creped from dryer 5 by doctor blade 7, after which it becomes designated as dried creped paper sheet 15.

Paper sheet 15 then passes between a pair of calender rolls 10 and 11. An aqueous dispersion or solution of softener is sprayed onto upper calender roll 10 and/or lower calender roll 11 by spray applicators 8 and 9, respectively, depending on whether one or both sides of paper sheet is to be treated with softener. The aqueous dispersion or solution of softener is applied by sprayers 8 and 9 to the surface of upper calender roll 10 and/or lower calender roll 11 as a pattern of droplets. These droplets containing the softener are then transferred by upper calender roll 10 and/or lower calender roll 11, (rotating in the direction indicated by arrows 10a and 11a) to the upper and/or lower surface of paper sheet 15. In the case of pattern-densified papers, the upper surface of paper sheet 15 usually corresponds to the rougher, fabric side of the paper, while the lower surface corresponds to the smoother, wire side of the paper. The upper calender roll 10 and/or lower calender roll 11 applies this pattern of softener droplets to the upper and lower surface of paper sheet 15. Softener-treated paper sheet 15 then passes over a circumferential portion of reel 12, and is then wound up onto parent roll 13.

One particular advantage of the embodiment shown in Figure 1 is the ability to heat upper calender roll 10 and/or lower calender roll 11. By heating calender rolls 10 and/or 11, some of the water in the aqueous dispersion or solution of softener is evaporated. This means

the pattern of droplets contain more concentrated amounts of the softener. As a result, a particularly effective amount of the softener is applied to the surface(s) of the tissue paper, but tends not to migrate to the interior of the paper web because of the reduced amount of water.

D. Softened Tissue Paper

Tissue paper softened according to the present invention, especially facial and toilet tissue, has a soft and velvet-like feel due to the softener applied to one or both surfaces of the paper. This softness can be evaluated by subjective testing that obtains what are referred to as Panel Score Units (PSU) where a number of expert softness judges are asked to rate the relative softness of a plurality of paired samples. The data are analyzed by a statistical method known as a paired comparison analysis. In this method, pairs of samples are first identified as such. Then, the pairs of samples are judged one pair at a time by each judge: one sample of each pair being designated X and the other Y. Briefly, each X sample is graded against its paired Y sample as follows:

1. a grade of zero is given if X and Y are judged to be equally soft.

2. a grade of plus one is given if X is judged to maybe be a little softer than Y, and a grade to minus one is given if Y is judged to maybe be a little softer than X;

3. a grade of plus two is given if X is judged to surely be a little softer than Y, and a grade of minus two is given if Y is judged to surely be a little softer than X;

4. a grade of plus three is given to X if it is judged to be a lot softer than Y, and a grade of minus three is given if Y is judged to be a lot softer than X; and lastly,

5. a grade of plus four is given to X if it is judged to be a whole lot softer than Y, and a grade of minus 4 is given if Y is judged to be a whole lot softer than X.

The resulting data from all judges and all sample pairs are then pair-averaged and rank ordered according to their grades. Then, the rank is shifted up or down in value as required to give a zero PSU value to whichever sample is chosen to be the zero-base standard. The other samples then have plus or minus values as determined by their relative grades with respect to the zero base standard. A difference of about 0.2 PSU usually represents a significance difference in subjectively perceived softness. Relative to the unsoftened tissue paper, tissue paper softened according to the present invention typically is about 0.5 PSU or greater in soft-

ness.

An important aspect of the present invention is that this softness enhancement can be achieved while other desired properties in the tissue paper are maintained, such as by compensating mechanical processing (e.g. pulp refining) and/or the use of chemical additives (e.g., starch binders). One such property is the total dry tensile strength of the tissue paper. As used herein, "total tensile strength" refers to the sum of the machine and cross-machine breaking strengths in grams per inch g/cm of the sample width. Tissue papers softened according to the present invention typically have total dry tensile strengths of at least about 360 g/in. (141 g/cm), with typical ranges of from about 360 to about 450 g/in. (141 to 177 g/cm) for single-ply facial/toilet tissues, from about 400 to about 500 g/in. (157 to 197 g/cm) for two-ply facial/toilet tissues, and from about 1000 to 1800 g/in. (394 to 709 g/cm) for towel products.

Another property that is important for tissue paper softened according to the present invention is its absorbency or wettability, as reflected by its hydrophilicity. Hydrophilicity of tissue paper refers, in general, to the propensity of the tissue paper to be wetted with water. Hydrophilicity of tissue paper can be quantified somewhat by determining the period of time required for dry tissue paper to become completely wetted with water. This period of time is referred to as the "wetting" (or "sinking") time. In order to provide a consistent and repeatable test for wetting time, the following procedure can be used for wetting time determinations: first, a paper sample (the environmental conditions for testing of paper samples are $23 \pm 1^\circ\text{C}$ and $50 \pm 2\%$ RH, as specified in TAPPI Method T 402), approximately 2.5 inch x 3.0 inches (about 6.4 cm x 7.6 cm) is cut from an 8 sheet thick stack of conditioned paper sheets; second, the cut 8 sheet thick paper sample is placed on the surface of 2500 ml. of distilled water at $23 \pm 1^\circ\text{C}$ and a timer is simultaneously started as the bottom sheet of the sample touches the water; third, the timer is stopped and read when wetting of the paper sample is completed, i. e. when the top sheet of the sample becomes completely wetted. Complete wetting is observed visually.

The preferred hydrophilicity of tissue paper depends upon its intended end use. It is desirable for tissue paper used in a variety of applications, e.g., toilet paper, to completely wet in a relatively short period of time to prevent clogging once the toilet is flushed. Preferably, wetting time is 2 minutes or less. More preferably, wetting time is 30 seconds or less. Most preferably, wetting time is 10 seconds or less.

The hydrophilicity of tissue paper can, of course, be determined immediately after manufacture. However, substantial increases in hydrophobicity can occur during the first two weeks after the tissue paper is made: i.e. after the paper has aged two (2) weeks following its manufacture. Thus, the above stated wetting times are preferably measured at the end of such two week period. Accordingly, wetting times measured at the end of a

two week aging period at room temperature are referred to as "two week wetting times."

Tissue papers softened according to the present invention should also desirably have relatively low lint properties. As used herein, "lint" typically refers to dust-like paper particles that are either unadhered, or loosely adhered, to the surface of the paper. The generation of lint is usually an indication of a certain amount of debonding of the paper fibers, as well as other factors such as fiber length, headbox layering, etc. In order to reduce lint formation, tissue paper softened according to the present invention typically requires the addition of starch binders to the papermaking fibers, as previously described in part A of this application.

As previously noted, the present invention is particularly useful in enhancing the softness of pattern densified tissue papers, in particular those having pattern designs. These pattern densified papers are typically characterized by a relatively low density (grams/cm³) and a relatively low basis weight (g/cm²). Pattern densified tissue papers according to the present invention typically have a density of about 0.60 g/cm³ or less, and a basis weight between about 10 g/m² and about 65 g/m². Preferably, these pattern densified papers have a density of about 0.3 g/cm³ or less (most preferably between about 0.04 g/cm³ and about 0.2 g/cm³), and a basis weight of about 40 g/m² or less. See Column 13, lines 61-67, of U.S. Patent 5,059,282 (Ampulski et al), issued October 22, 1991, which describes how the density of paper is measured.

The particle size of the nonionic softener is measured using conventional optical microscopy. The average particle size and particle size distribution are calculated using image analysis technique. The viscosity of the aqueous dispersion is measured using a disk rheometer.

The following examples illustrate the practice of the present invention but are not intended to be limiting thereof.

Example 1

The purpose of this example is to illustrate a method that can be used to make-up a mixture of a tri-component biodegradable softener composition comprising: (i) a nonionic softener (sold under the trade name GLYCOMUL-S CG by Lonza, Inc.); (ii) a nonionic surfactant compatibilizer (sold under the trade name TWEEN 60 by ICI Americas, Inc.); and (iii) a polyethylene glycol 400 (sold under the trade name PEG-400 by Union Carbide, Inc.), wherein the weight ratio of GLYCOMUL-S CG to TWEEN 60 is 4 : 1.

A 10% solution of the biodegradable chemical softener mixture is prepared according to the following procedure: 1. Weigh GLYCOMUL-S CG and TWEEN 60 in a weight ratio of 4 : 1; 2. Heat-up (1) to a temperature of about 140 °F (60 °C); 3. Adequate mixing is provided to form an uniform mixture; 4. Weigh PEG-400 in

a weight ratio of 1 : 2 compared to GLYCOMUL-S CG; 5. Heat-up (4) to a temperature of about 140 °F (60 °C); 6. Adequate mixing is provided to form an uniform mixture of (3) & (5); 7. Weigh an equivalent weight ratio of water to the mixture of (6); 8. Heat-up (7) to a temperature of about 140 °F (60°C); 9. Add the mixture of (6) gradually to (8) while adequate mixing is provided using a ULTRA TURRAX high speed mixer made by Tekmar Company to form a fine aqueous dispersion of (6); 10. Dilute (9) to a desired concentration; 11. The particle size of the aqueous dispersion is determined using an optical microscopic technique. The particle size ranges from about 50 to 100 micrometer; 12. The viscosity of the aqueous dispersion measured using a disk rheometer ranges from about 150 to 250 centipoises (150 to 250 mPa-s) at room temperature.

Example 2

The purpose of this example is to illustrate a method that can be used to make-up a mixture of a tri-component biodegradable softener composition comprising: (i) a nonionic softener (sold under the trade name GLYCOMUL-S CG by Lonza, Inc.); (ii) a nonionic surfactant compatibilizer (sold under the trade name TWEEN 60 by ICI Americas, Inc.); and (iii) a polyethylene glycol 400 (sold under the trade name PEG-400 by Union Carbide, Inc.); wherein the weight ratio of GLYCOMUL-S CG to TWEEN 60 is 1 : 1.

A 10% solution of the biodegradable chemical softener mixture is prepared according to the following procedure : 1. Weigh GLYCOMUL-S CG and TWEEN 60 in a weight ratio of 1 : 1 ; 2. Heat-up (1) to a temperature about 140 °F (60 °C) 3. Adequate mixing is provided to form an uniform mixture; 4. Weigh PEG-400 in a weight ratio of 1 : 1 compared to GLYCOMUL-S CG; 5. Heat-up (4) to a temperature about 140 °F (60 °C); 6. Adequate mixing is provided to form an uniform mixture of (3) & (5); 7. Weigh an equivalent weight ratio of water to the mixture of (6); 8. Heat-up (7) to a temperature about 140 °F (60°C); 9. Add the mixture of (6) gradually to (8) while adequate mixing is provided using a ULTRA TURRAX high speed mixer made by Tekmar Company to form a fine aqueous dispersion of (6); 10. Dilute (9) to a desired concentration; 11. The particle size of the aqueous dispersion is determined using an optical microscopic technique. The particle size ranges from about 30 to 60 micrometer; 12. The viscosity of the aqueous dispersion measured using a disk rheometer ranges from about 100 to 200 centipoises (100 to 200 mPa-s) at room temperature.

Example 3

The purpose of this example is to illustrate a method using a blow through drying papermaking technique to make a soft and absorbent tissue paper sheet that is treated with a biodegradable chemical softener mixture

prepared according to Example 1 using a spraying technique and a temporary wet strength resin.

A pilot scale Fourdrinier papermaking machine is used. The machine has a layered headbox with a top chamber, a center chamber, and a bottom chamber. A first fibrous slurry comprised primarily of short papermaking fibers (Eucalyptus Hardwood Kraft) is pumped through the top and bottom headbox chambers. Simultaneously, a second fibrous slurry comprised primarily of long papermaking fibers (Northern Softwood Kraft) and a 2% solution of the temporary wet strength resin (i.e. National Starch 78-0080 marketed by National Starch and Chemical corporation of New-York, NY) are pumped through the center headbox chamber and delivered in a superposed relationship onto the Fourdrinier wire to form a 3-layer embryonic web. The first slurry has a fiber consistency of about 0.11%, while the second slurry has a fiber consistency of about 0.15%. The embryonic web is dewatered through the Fourdrinier wire (5-shed, satin weave configuration having 87 machine-direction and 76 crossmachine-direction monofilaments per inch, respectively), the dewatering being assisted by deflector and vacuum boxes.

The wet embryonic web is transferred from the Fourdrinier wire to a carrier fabric similar to that shown in Figure 10 of U.S. Patent 4,637,859, but with an aesthetically pleasing macropattern of rose petals superimposed on the regular micropattern of the carrier fabric. At the point of transfer to the carrier fabric, the web has a fiber consistency of about 22%. The wet web is moved by the carrier fabric past a vacuum dewatering box, through blow-through predryers, and then transferred onto a Yankee dryer. The web has a fiber consistency of about 27% after the vacuum dewatering box, and about 65% after the predryers and prior to transfer onto the Yankee dryer.

The web is adhered to the surface of the Yankee dryer by a creping adhesive comprising a 0.25% aqueous solution of polyvinyl alcohol that is applied to the surface of the dryer. The Yankee dryer is operated at a temperature of about 177°C and a surface speed of about 244 meters per minute. The dried web is then creped from the Yankee dryer with a doctor blade having a bevel angle of about 24° and positioned with respect to the dryer to provide an impact angle of about 83°. Prior to creping, the fiber consistency of the dried web is increased to an estimated 99%.

The dried, creped web (moisture content of 1%) is then passed between a pair of calender rolls biased together at roll weight and operated at surface speeds of 201 meters per minute. The lower, hard rubber calender roll is sprayed with the previously prepared aqueous dispersion of softener by four 0.71 mm diameter spray nozzles aligned in a linear fashion with a spacing of about 10 cm between nozzles. The volumetric flow rate of the aqueous dispersion of softener through each nozzle is about 0.37 liters per minute per cross-direction meter. The aqueous dispersion of softener is sprayed onto this

lower calendar roll as a pattern of droplets that are then transferred to the smoother, wire side of the dried, creped web by direct pressure transfer. The retention rate of the softener on the dried web is, in general, about 67%. The resulting softened tissue paper has a basis weight of about 30 grams/m², a density of about 0.10 grams/cm³, and contains about 0.1% of the temporary wet strength and about 0.6% of the tri-component softener by weight of the dry paper.

Example 4

The purpose of this example is to illustrate a method using a blow through drying papermaking technique to make a soft and absorbent tissue paper sheet that is treated with a biodegradable chemical softener mixture prepared according to Example 2 using a spraying technique and a temporary wet strength resin.

A pilot scale Fourdrinier papermaking machine is used. The machine has a layered headbox with a top chamber, a center chamber, and a bottom chamber. A first fibrous slurry comprised primarily of short papermaking fibers (Eucalyptus Hardwood Kraft) is pumped through the top and bottom headbox chambers. Simultaneously, a second fibrous slurry comprised primarily of long papermaking fibers (Northern Softwood Kraft) and a 2% solution of the temporary wet strength resin (i.e. National Starch 78-0080 marketed by National Starch and Chemical corporation of New-York, NY) are pumped through the center headbox chamber and delivered in a superposed relationship onto the Fourdrinier wire to form a 3-layer embryonic web. The first slurry has a fiber consistency of about 0.11%, while the second slurry has a fiber consistency of about 0.15%. The embryonic web is dewatered through the Fourdrinier wire (5-shed, satin weave configuration having 87 machine-direction and 76 crossmachine-direction monofilaments per inch, respectively), the dewatering being assisted by deflector and vacuum boxes.

The wet embryonic web is transferred from the Fourdrinier wire to a carrier fabric similar to that shown in Figure 10 of U.S. Patent 4,637,859, but with an aesthetically pleasing macropattern of rose petals superimposed on the regular micropattern of the carrier fabric. At the point of transfer to the carrier fabric, the web has a fiber consistency of about 22%. The wet web is moved by the carrier fabric past a vacuum dewatering box, through blow-through predryers, and then transferred onto a Yankee dryer. The web has a fiber consistency of about 27% after the vacuum dewatering box, and about 65% after the predryers and prior to transfer onto the Yankee dryer.

The web is adhered to the surface of the Yankee dryer by a creping adhesive comprising a 0.25% aqueous solution of polyvinyl alcohol that is applied to the surface of the dryer. The Yankee dryer is operated at a temperature of about 177°C and a surface speed of about 244 meters per minute. The dried web is then

creped from the Yankee dryer with a doctor blade having a bevel angle of about 24° and positioned with respect to the dryer to provide an impact angle of about 83°. Prior to creping, the fiber consistency of the dried web is increased to an estimated 99%.

The dried, creped web (moisture content of 1%) is then passed between a pair of calendar rolls biased together at roll weight and operated at surface speeds of 201 meters per minute. The lower, hard rubber calendar roll is sprayed with the previously prepared aqueous dispersion of softener by four 0.71 mm diameter spray nozzles aligned in a linear fashion with a spacing of about 10 cm between nozzles. The volumetric flow rate of the aqueous dispersion of softener through each nozzle is about 0.37 liters per minute per cross-direction meter. The aqueous dispersion of softener is sprayed onto this lower calendar roll as a pattern of droplets that are then transferred to the smoother, wire side of the dried, creped web by direct pressure transfer. The retention rate of the softener on the dried web is, in general, about 67%. The resulting softened tissue paper has a basis weight of about 30 grams/m², a density of about 0.10 grams/cm³, and contains about 0.1% of the temporary wet strength and about 0.7% of the tri-component softener by weight of the dry paper.

Claims

1. A softened tissue paper having on at least one surface thereof a tri-component biodegradable softener composition mixture characterized in that it comprises:

(a) a nonionic softener selected from sorbitan mono-, di-, tri- esters and mixtures thereof;

(b) a nonionic surfactant compatibilizer selected from ethoxylated sorbitan esters, propoxylated sorbitan esters, alkylpolyglycosides and mixtures thereof; and

(c) a polyhydroxy compound selected from glycerol, polyethylene glycol, polypropylene glycol and mixtures thereof;

the tri-component softener being present in an amount from 0.1% to 3%, preferably from 0.2 to 0.8%, by weight of the dry tissue paper.

2. The tissue paper of Claim 1 wherein the weight ratio of the nonionic softener to the nonionic surfactant compatibilizer ranges from 10 : 1 to 1 : 10, and wherein the weight ratio of the nonionic softener to the polyhydroxy compound ranges from 10 : 1 to 1 : 10.

3. The tissue paper of Claim 1 or 2 wherein said soft-

tener is applied nonuniformly to said at least one surface of said tissue paper, preferably as a pattern of softer droplets.

4. The tissue paper of any of Claims 1 - 3 wherein said softer is applied to said at least one surface of said tissue paper by printing. 5
5. The tissue paper of any of Claims 1 - 4 which is a pattern densified tissue paper having a basis weight between 10 g/m² and 65 g/m² and a density of 0.6 g/cm³ or less. 10
6. The tissue paper of any of Claims 1 - 5 wherein said nonionic softener is a sorbitan ester of a C₁₂-C₂₂ fatty acid, preferably selected from sorbitan laurates, sorbitan myristates, sorbitan palmitates, sorbitan stearates, sorbitan behenates and mixtures thereof. 15
7. The tissue paper of any of Claims 1 - 6 wherein said nonionic surfactant compatibilizer is an ethoxylated sorbitan ester of a C₁₂-C₂₂ fatty acid having an average degree of ethoxylation of from 1 to 20, preferably selected from ethoxylated sorbitan laurates, ethoxylated sorbitan myristates, ethoxylated sorbitan palmitates, ethoxylated sorbitan stearates, ethoxylated sorbitan behenates and mixtures thereof, the ethoxylated sorbitan ester preferably having an average degree of ethoxylation of from 2 to 10, more preferably from 2 to 6. 20
8. The tissue paper of any of Claims 1 - 7 wherein the polyhydroxy compound is a polyethylene glycol having a weight average molecular weight ranging from 200 to 4000, preferably from 200 to 600. 25
9. The tissue paper of any of Claims 1 - 7 wherein the polyhydroxy compound is polypropylene glycol having a weight average molecular weight ranging from 200 to 4000, preferably from 200 to 600. 30

Patentansprüche

1. Ein weichgemachtes Tissue-Papier, das auf mindestens einer seiner Oberflächen eine trikomponentige biologisch abbaubare Weichmacher-Zusammensetzungsmischung aufweist, die dadurch gekennzeichnet ist, daß sie umfaßt: 35
- [a] einen nichtionischen Weichmacher, der aus Sorbitan-Mono-, -Di- und -Triestern und Mischungen hiervon ausgewählt ist, 40
- [b] ein nichtionisches oberflächenaktives Kompatibilisierungsmittel, das aus ethoxylierten Sorbitan-Estern, propoxylierten Sorbitan-Estern, Alkylpolyglycosiden und Mischungen 45

hievon ausgewählt ist; und
[c] eine Polyhydroxyverbindung, die aus Glyzerin, Polyethylenglykol, Polypropylenglykol und Mischungen hiervon ausgewählt ist;

wobei der trikomponentige Weichmacher in einer Menge von 0,1 % bis 3 %, vorzugsweise von 0,2 % bis 0,8 %, bezogen auf das Gewicht des trockenen Tissue-Papiers, vorliegt.

2. Das Tissue-Papier nach Anspruch 1, in welchem das Gewichtsverhältnis von nichtionischem Weichmacher zu nichtionischem oberflächenaktiven Kompatibilisierungsmittel im Bereich von 10:1 bis 1:10 liegt und das Gewichtsverhältnis von nichtionischem Weichmacher zu Polyhydroxyverbindung im Bereich von 10:1 bis 1:10 liegt. 5
3. Das Tissue-Papier nach Anspruch 1 oder 2, in welchem der genannte Weichmacher ungleichmäßig auf die genannte mindestens eine Oberfläche des genannten Tissue-Papiers, vorzugsweise als ein Muster von Weichmacher-Tröpfchen, aufgebracht ist. 10
4. Das Tissue-Papier nach einem der Ansprüche 1 bis 3, in welchem der genannte Weichmacher auf die genannte mindestens eine Oberfläche des genannten Tissue-Papiers durch Drucken aufgebracht ist. 15
5. Das Tissue-Papier nach einem der Ansprüche 1 bis 4, welches ein musterverdichtetes Tissue-Papier mit einem Flächengewicht zwischen 10 g/m² und 65 g/m² und einer Dichte von 0,6 g/cm³ oder weniger ist. 20
6. Das Tissue-Papier nach einem der Ansprüche 1 bis 5, in welchem der genannte nichtionische Weichmacher ein Sorbitan-Ester einer C₁₂-C₂₂-Fettsäure ist, der vorzugsweise aus Sorbitan-Lauraten, Sorbitan-Myristaten, Sorbitan-Palmitaten, Sorbitan-Stearaten, Sorbitan-Behenaten und Mischungen hiervon ausgewählt ist. 25
7. Das Tissue-Papier nach einem der Ansprüche 1 bis 6, in welchem das genannte nichtionische oberflächenaktive Kompatibilisierungsmittel ein ethoxylierter Sorbitan-Ester einer C₁₂-C₂₂-Fettsäure mit einem mittleren Ethoxyierungsgrad von 1 bis 20 ist, der vorzugsweise aus ethoxylierten Sorbitan-Lauraten, ethoxylierten Sorbitan-Myristaten, ethoxylierten Sorbitan-Palmitaten, ethoxylierten Sorbitan-Stearaten, ethoxylierten Sorbitan-Behenaten und Mischungen hiervon ausgewählt ist, wobei der ethoxylierte Sorbitan-Ester vorzugsweise einen mittleren Ethoxyierungsgrad von 2 bis 10, bevorzugter von 2 bis 6, aufweist. 30

8. Das Tissue-Papier nach einem der Ansprüche 1 bis 7, in welchem die Polyhydroxyverbindung ein Polyethylenglykol mit einem gewichtsgemittelten Molekulargewicht im Bereich von 200 bis 4000, vorzugsweise von 200 bis 600, ist. 5
9. Das Tissue-Papier nach einem der Ansprüche 1 bis 7, in welchem die Polyhydroxyverbindung ein Polypropylenglykol mit einem gewichtsgemittelten Molekulargewicht im Bereich von 200 bis 4000, vorzugsweise von 200 bis 600, ist. 10

Revendications

1. Papier mousseline adouci possédant, sur une de ses surfaces, un mélange de composition d'adoucissant biodégradable à trois composants, caractérisé en ce qu'il comprend: 15
- (a) un adoucissant non ionique choisi parmi les mono-, di- et tri-esters de sorbitane, et leurs mélanges;
- (b) un compatibilisant tensioactif non ionique choisi parmi les esters de sorbitane éthoxylés, les esters de sorbitane propoxylés, les alkylpolyglycosides, et leurs mélanges; et 25
- (c) un composé polyhydroxylé choisi parmi le glycérol, le polyéthylèneglycol, le polypropylèneglycol, et leurs mélanges; 30
- l'adoucissant à trois composants étant présent à raison de 0,1% à 3%, de préférence de 0,2 à 0,8%, en poids du papier mousseline sec. 35
2. Papier mousseline selon la revendication 1, dans lequel le rapport pondéral de l'adoucissant non ionique au compatibilisant tensioactif non ionique s'échelonne de 10:1 à 1:10 et dans lequel le rapport pondéral de l'adoucissant non ionique au composé polyhydroxylé s'échelonne de 10:1 à 1:10. 40
3. Papier mousseline selon la revendication 1 ou 2, dans lequel ledit adoucissant est appliqué non uniformément sur ladite surface, au nombre d'au moins un, dudit papier mousseline, de préférence selon un dessin de gouttelettes d'adoucissant. 45
4. Papier mousseline selon l'une quelconque des revendications 1-3, dans lequel ledit adoucissant est appliqué sur ladite surface, au nombre d'au moins un, dudit papier mousseline par impression. 50
5. Papier mousseline selon l'une quelconque des revendications 1-4, qui est un papier mousseline densifié selon un dessin ayant un grammage entre 10 g/m² et 65 g/m² et une masse volumique de 0,6 g/cm³ ou moins. 55
6. Papier mousseline selon l'une quelconque des revendications 1-5, dans lequel ledit adoucissant non ionique est un ester de sorbitane d'un acide gras en C₁₂-C₂₂ choisi de préférence parmi les laurates de sorbitane, les myristates de sorbitane, les palmitates de sorbitane, les stéarates de sorbitane, les béhénates de sorbitane, et leurs mélanges.
7. Papier mousseline selon l'une quelconque des revendications 1-6, dans lequel ledit compatibilisant tensioactif non ionique est un ester de sorbitane éthoxylé d'un acide gras en C₁₂-C₂₂ ayant un degré moyen d'éthoxylation de 1 à 20, de préférence choisi parmi les laurates de sorbitane éthoxylés, les myristates de sorbitane éthoxylés, les palmitates de sorbitane éthoxylés, les stéarates de sorbitane éthoxylés, les béhénates de sorbitane éthoxylés, et leurs mélanges, l'ester de sorbitane éthoxylé ayant de préférence un degré moyen d'éthoxylation de 2 à 10, mieux encore de 2 à 6. 20
8. Papier mousseline selon l'une quelconque des revendications 1-7, dans lequel le composé polyhydroxylé est un polyéthylèneglycol ayant une masse moléculaire moyenne en poids s'échelonnant de 200 à 4 000, de préférence de 200 à 600.
9. Papier mousseline selon l'une quelconque des revendications 1-7, dans lequel le composé polyhydroxylé est un polypropylèneglycol ayant une masse moléculaire moyenne en poids s'échelonnant de 200 à 4 000, de préférence de 200 à 600.

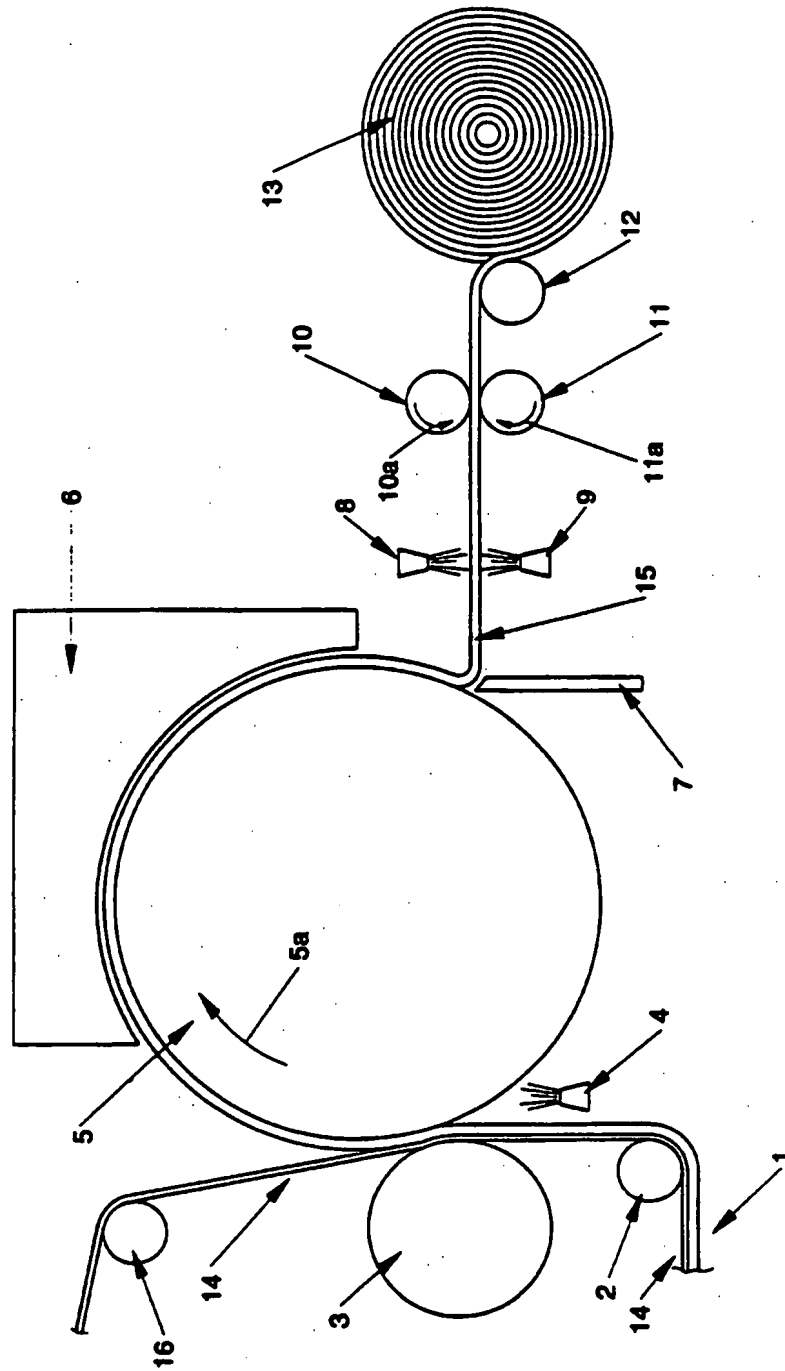


Fig. 1